


Android V


DESIGN DANIEL LIBESKIND



Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.264
Watt Δt 40° = Watt Δt 50° x 0.750
Watt Δt 30° = Watt Δt 50° x 0.517
Watt Δt 20° = Watt Δt 50° x 0.307

p max = 5.0 bar

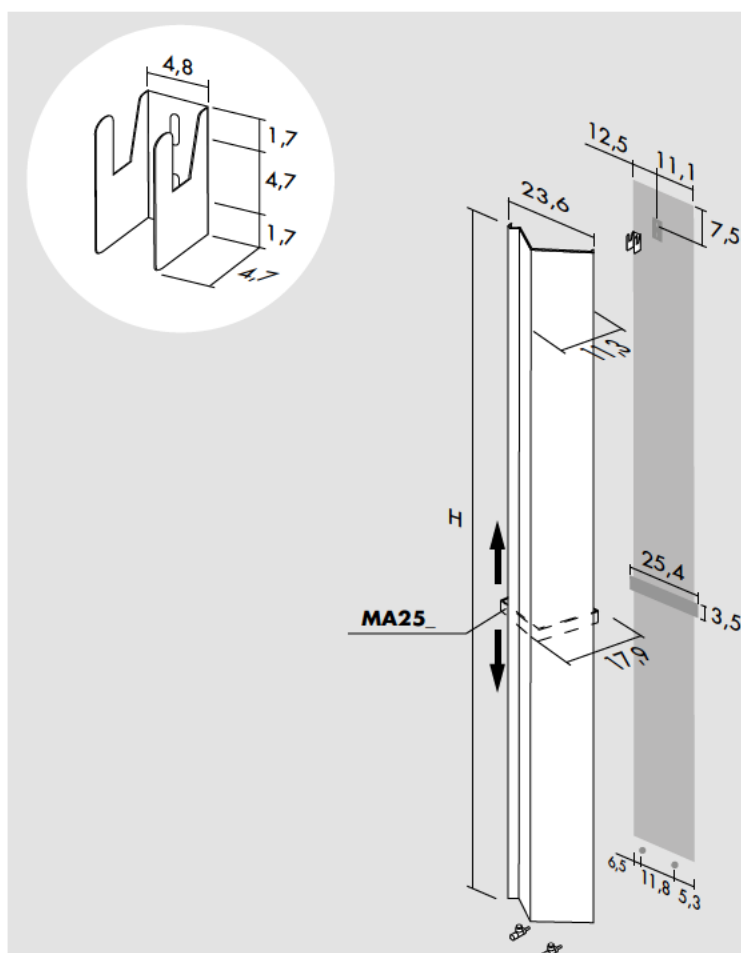



[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

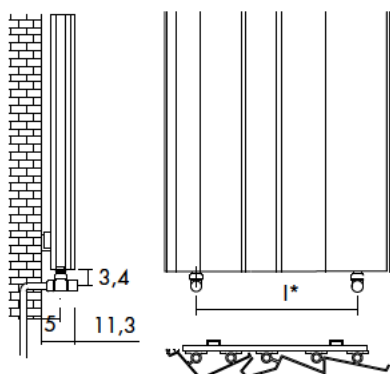



[H]

Special connection / Raccord spéciale
Speziell Anschluss / Conexión especial

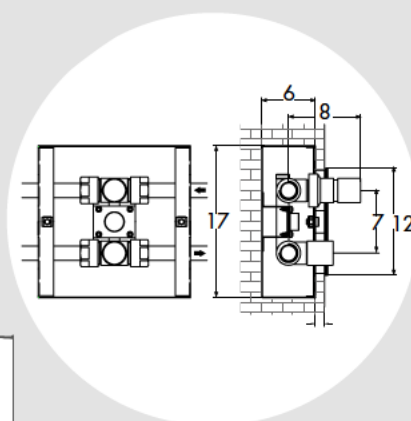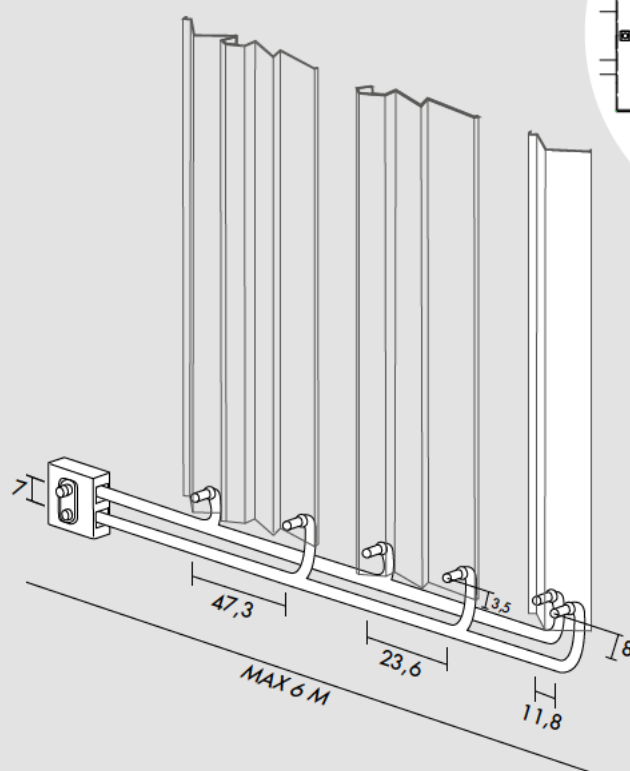

Built-in valves
Vanne à encastrer
Einbauventile
Válvulas de empotrar
[CROM] E12VIR



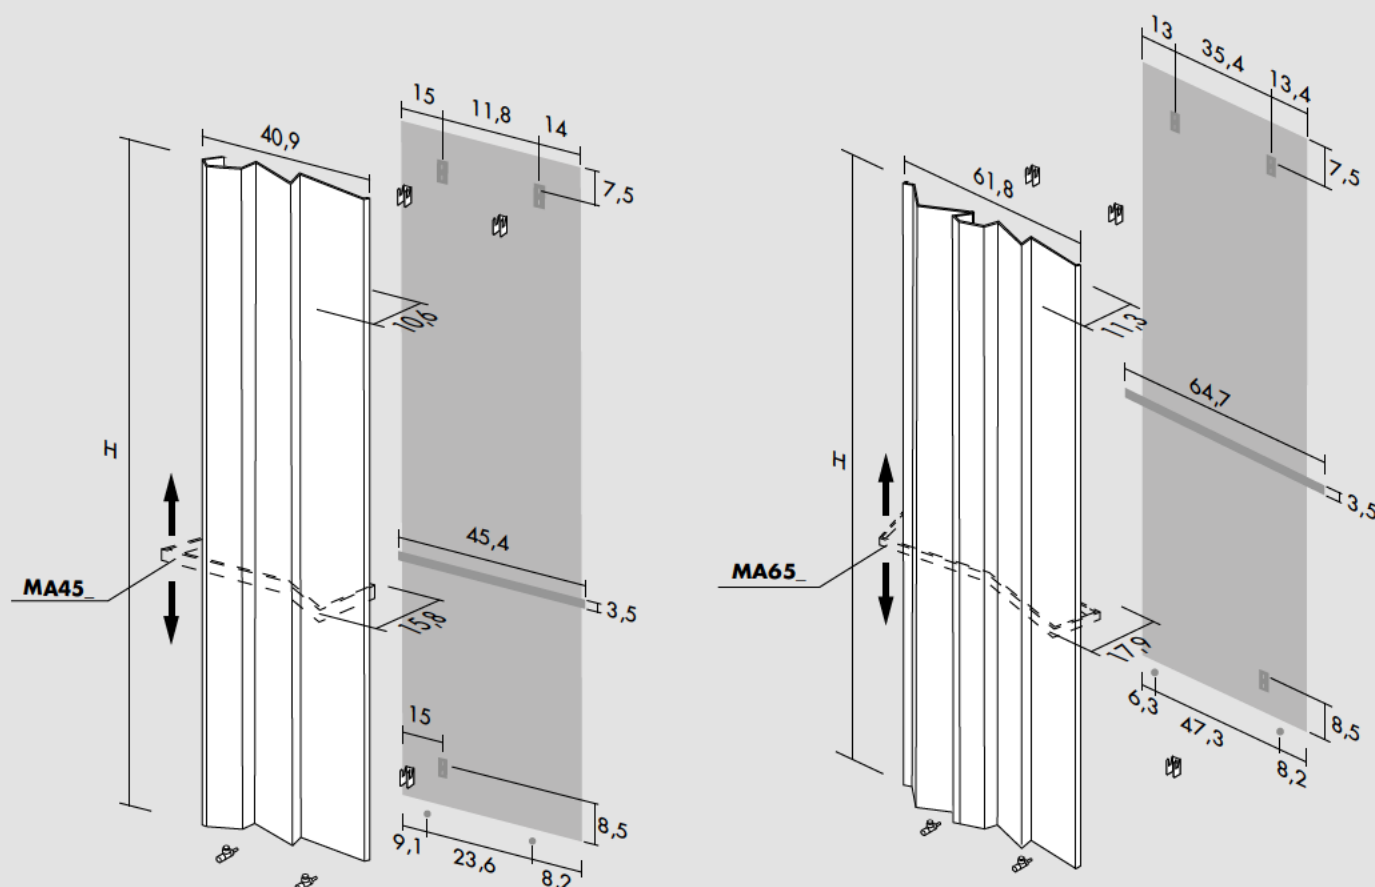

Android V

H cm	L cm	l* cm	art*	l*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
150.0	23.6	11.8	ANDV150023_	0.9	240	464		
150.0	40.9	23.6	ANDV150040_	1.5	384	742		
150.0	61.8	47.3	ANDV150061_	2.5	596	1 153		
180.0	23.6	11.8	ANDV180023_	1.0	283	547		
180.0	40.9	23.6	ANDV180040_	1.8	452	875		
180.0	61.8	47.3	ANDV180061_	2.9	703	1 360		
200.0	23.6	11.8	ANDV200023_	1.2	312	603		
200.0	40.9	23.6	ANDV200040_	1.9	498	964		
200.0	61.8	47.3	ANDV200061_	3.3	775	1 499		

[BASIC]

BCOR NEOP

Optional




(P* = 232)

Angled Valve
 Vanne équerre
 Eckausführung Ventil
 Válvula a escuadra
 [CROM] **E125QR**



(P* = 234)

Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático
 [CROM] **TTR**



(P* = 229)

$\varnothing \leq 16$ mm
 [CROM] **CTR**
 16 mm < $\varnothing$ < 24 mm
 [CROM] **CWR**




25,4 cm
 [XLUC] **MA25L**
 [COLOR] **MA25C**
 [GOLD] **MA25G**
 45,4 cm
 [XLUC] **MA45L**
 [COLOR] **MA45C**
 [GOLD] **MA45G**
 64,7 cm
 [XLUC] **MA65L**
 [COLOR] **MA65C**
 [GOLD] **MA65G**

*other colors and finishes on page / autres couleurs et finitions à la page
 andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo l* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página

Android O

DESIGN DANIEL LIBESKIND



Kcal= Watt x 0.860

BTU= Watt x 3.413


Watt Δt 60°= Watt Δt 50° x 1.257

Watt Δt 40°= Watt Δt 50° x 0.755

Watt Δt 30°= Watt Δt 50° x 0.526


Watt Δt 20°= Watt Δt 50° x 0.316

p max = 5.0 bar

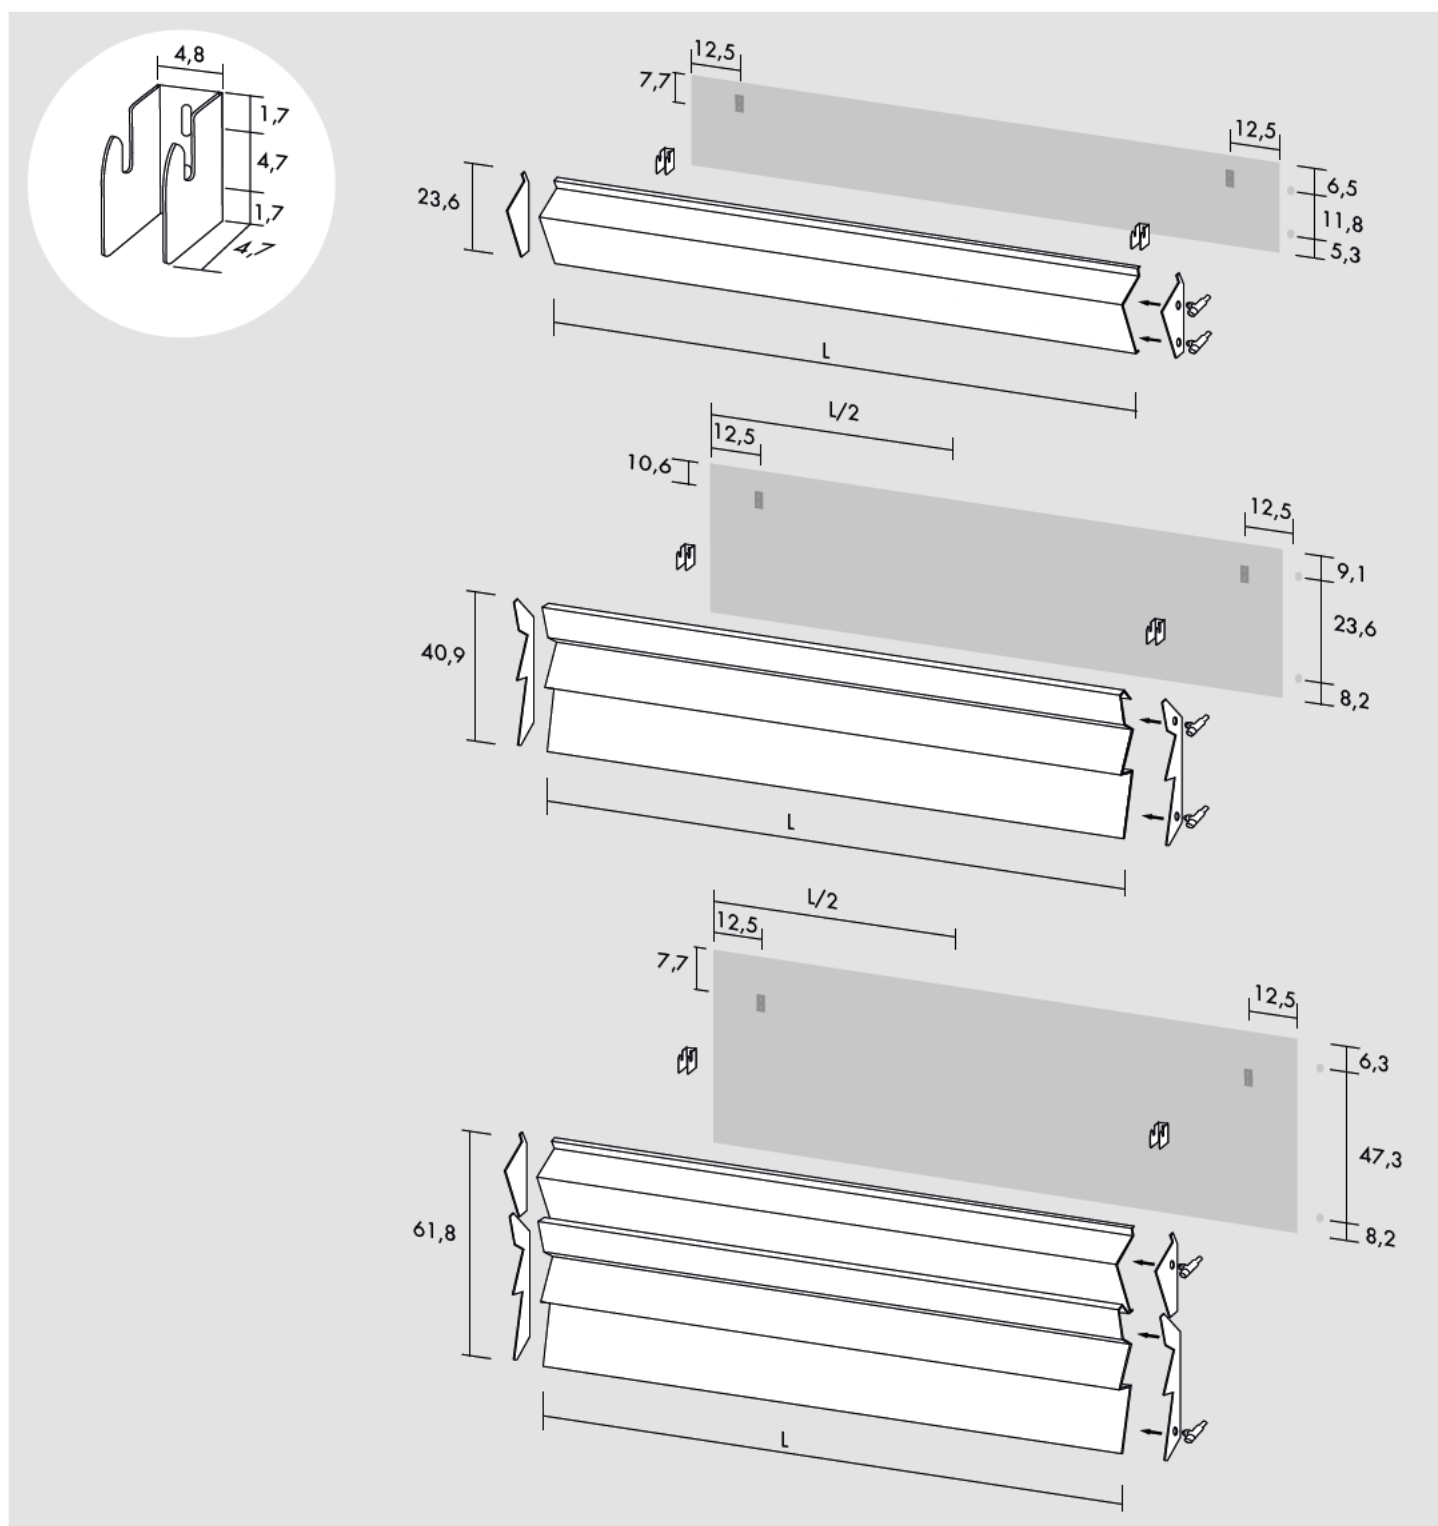



[F]

Standard connection / Raccord standard
 Standard Anschluss / Conexión estándar

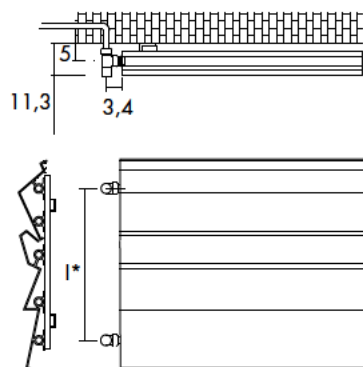

[H]


Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

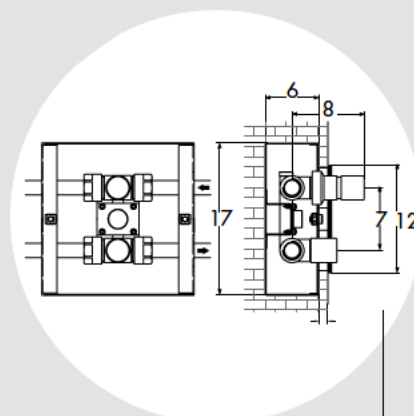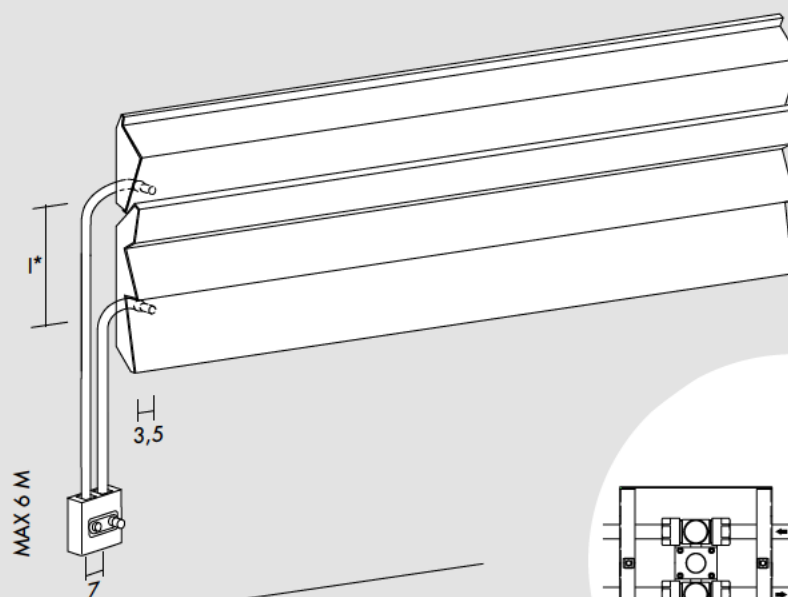


Built-in valves
 Vanne à encastrer
 Einbauventile
 Válvulas de empotrar

[CROM] E12VIR


[FS]




[FD]



[HS]



[HD]



Android O

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
23.6	150.0	11.8	ANDO150023_	0.9	224	426		
40.9	150.0	23.6	ANDO150040_	1.5	359	682		
61.8	150.0	47.3	ANDO150061_	2.5	544	1 034		
23.6	180.0	11.8	ANDO180023_	1.1	269	512		
40.9	180.0	23.6	ANDO180040_	1.8	430	818		
61.8	180.0	47.3	ANDO180061_	3.0	653	1 241		
23.6	200.0	11.8	ANDO200023_	1.2	299	569		
40.9	200.0	23.6	ANDO200040_	1.2	478	909		
61.8	200.0	47.3	ANDO200061_	3.3	725	1 379		

[BASIC]

BCOR NEOP

Optional




(P* = 232)

Angled Valve
 Vanne équerre
 Eckausführung Ventil
 Válvula a escuadra
 [CROM] E12SQR



(P* = 234)

Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático
 [CROM] TTR



(P* = 229)

$\varnothing \leq 16$ mm
 [CROM] CTR
 $16 \text{ mm} < \varnothing < 24$ mm
 [CROM] CWR



(P* = 234)

Built-in valves
 Vanne à encastrer
 Einbauventile
 Válvulas de empotrar
 [CROM] E12VIR

*other colors and finishes on page / autres couleurs et finitions à la page
 andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo Lt* = pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página


Android IQ

DESIGN DANIEL LIBESKIND

Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.264
Watt Δt 40° = Watt Δt 50° x 0.750
Watt Δt 30° = Watt Δt 50° x 0.517
Watt Δt 20° = Watt Δt 50° x 0.307

p max = 5.0 bar

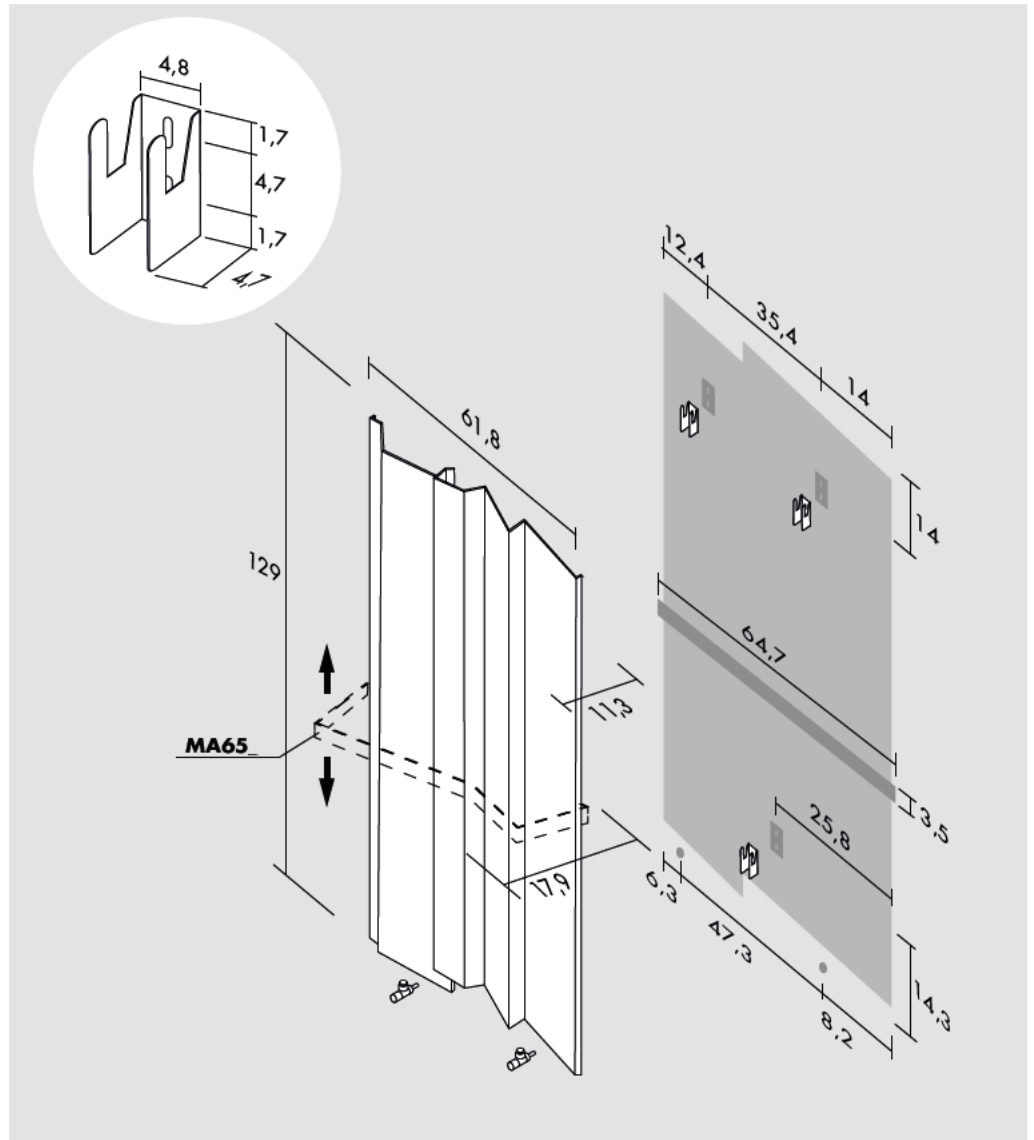



[F]

Standard connection / Raccord standard
 Standard Anschluss / Conexión estándar

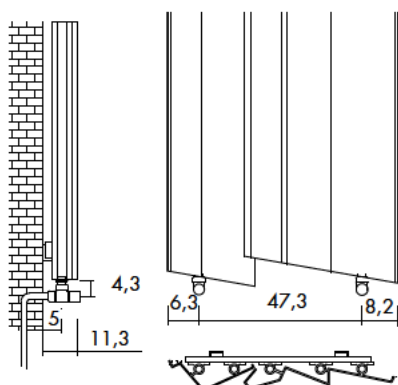


[H]

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

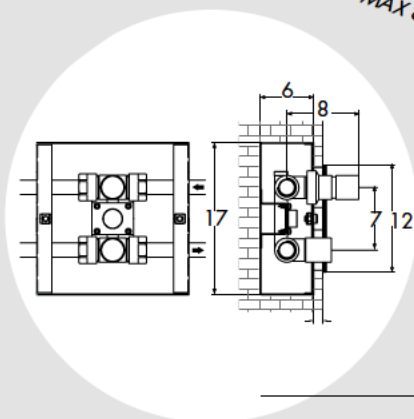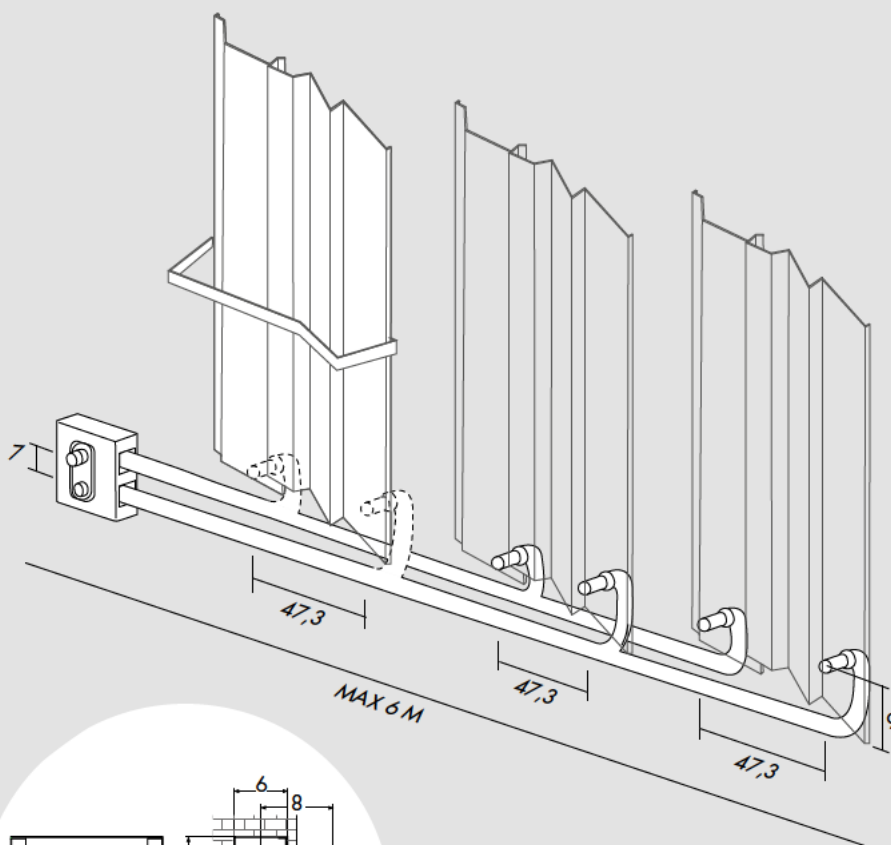

Built-in valves
 Vanne à encastrer
 Einbauventile
 Válvulas de empotrar

[CROM] E12VIR



Android IQ

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
129.0	61.8	47.3	ANIQ129061	2.1	498	964		

[BASIC]

BCOR

NEOP


Optional



Angled Valve
 Vanne équerre
 Eckausführung Ventil
 Válvula a escuadra
 [CROM] E12SQR



Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático
 [CROM] TTR



$\varnothing \leq 16$ mm
 [CROM] CTR
 $16 \text{ mm} < \varnothing < 24$ mm
 [CROM] CWR



Towel bar
 Porte-serviettes
 Hsndtuchslter
 Porta toallas
 [XLUC] MA65L
 [COLOR] MA65C
 [GOLD] MA65G

*other colors and finishes on page / autres couleurs et finitions à la page
 andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo Lt* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página