

BDO Trim


UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°



Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.255
Watt Δt 40° = Watt Δt 50° x 0.758
Watt Δt 30° = Watt Δt 50° x 0.530
Watt Δt 20° = Watt Δt 50° x 0.320

p max = 10.0 bar

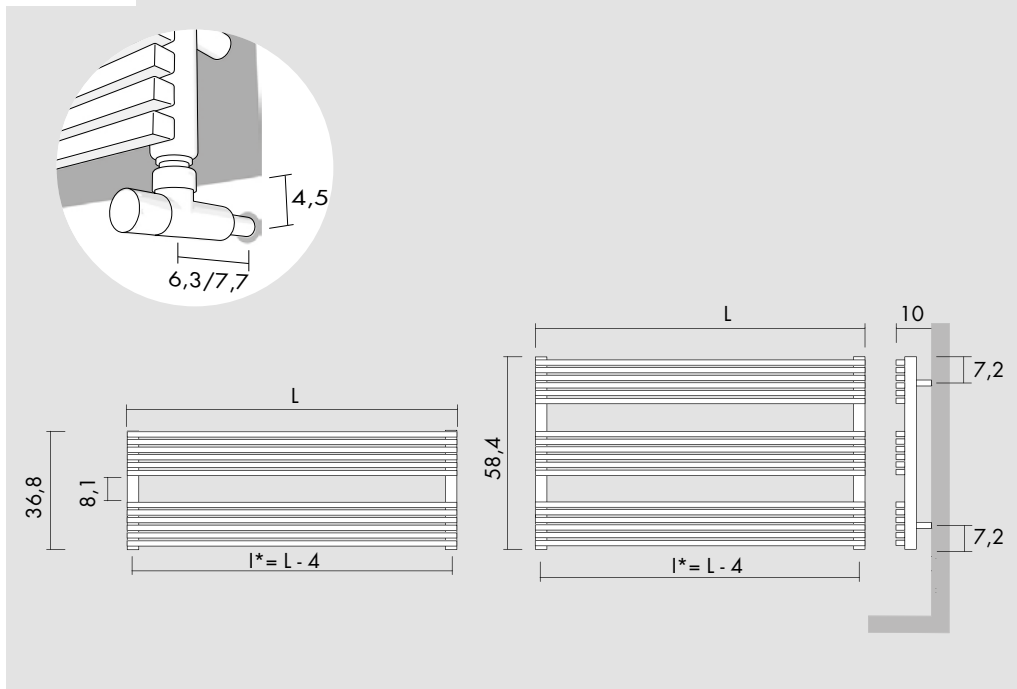

H cm	L cm	I* cm	art*	Li*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
36.8	120.0	116.0	HB155120036_	3.7	283	534		
36.8	140.0	136.0	HB155140036_	4.3	328	619		
36.8	160.0	156.0	HB155160036_	4.8	377	712		
58.4	120.0	116.0	HB155120058_	5.7	425	801		
58.4	140.0	136.0	HB155140058_	6.5	492	929		
58.4	160.0	156.0	HB155160058_	7.3	566	1 068		


[BASIC]

BIAN


BCOR

NEOP

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

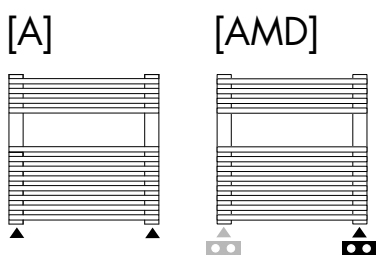

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

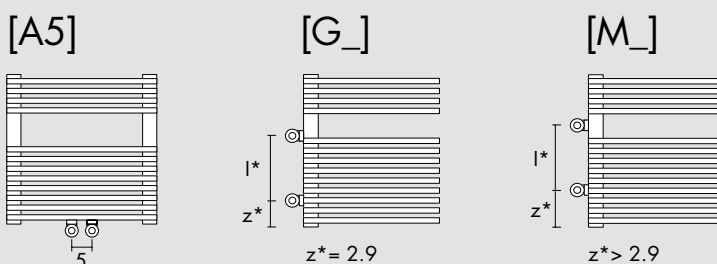

Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).

Optional




Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra

[CROM] **E12SQR**




Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[CROM] **TTR**



Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo

[CROM] **C5R**



$\varnothing \leq 16$ mm
[CROM] **CTR**

 $16 \text{ mm} < \varnothing < 24$ mm
[CROM] **CWR**



Towel hooks
Paire de patère
Crochet das Bugel
Percha

[INOX] **3A20X**

*other colors and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Li* = water content / volume d'eau / Wassergehalt / contenido de agua
P* = page / page / Seite / página