



Kcal = Watt x 0.860
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.267
Watt Δt 40° = Watt Δt 50° x 0.749
Watt Δt 30° = Watt Δt 50° x 0.516
Watt Δt 20° = Watt Δt 50° x 0.305

p max = 10.0 bar



The availability is limited to stocks
Disponible jusqu'à épuisement des stocks
Verfügbar solange der Vorrat reicht
Disponible hasta fin de existencias

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

[X]




[XM_]

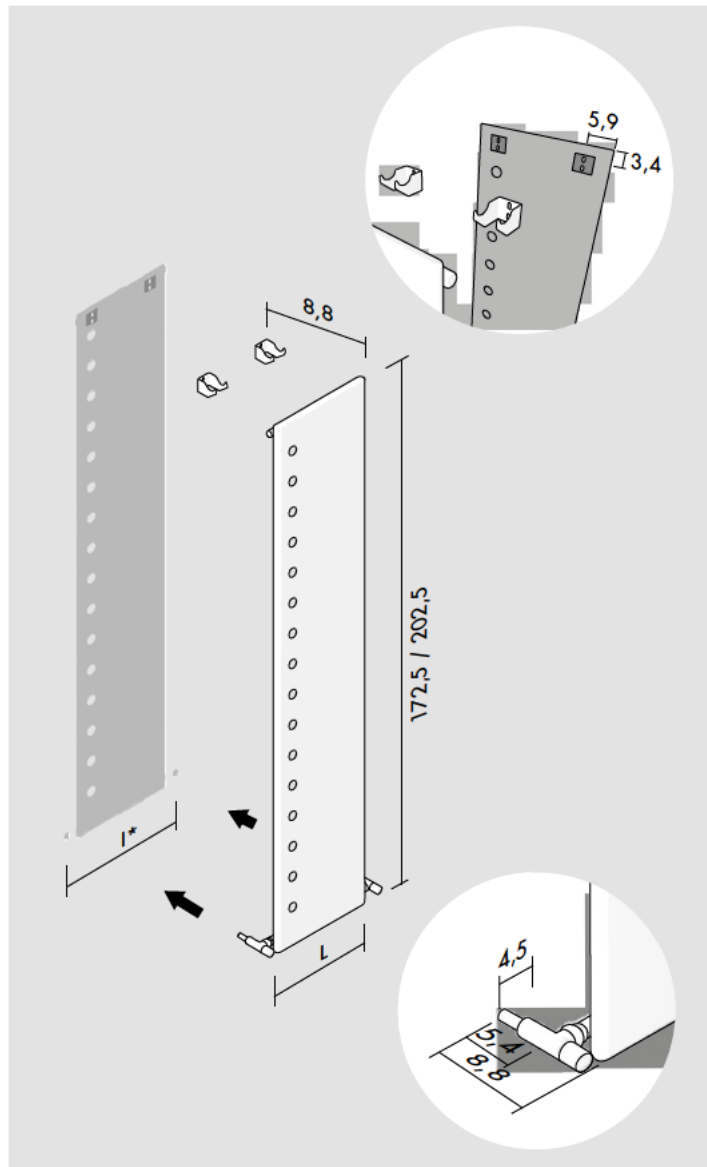


Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial


[B]




[E]




[S] ⚠ (P* 242)




[D] ⚠ (P* 242)




[PS] ⚠ (P* 242)




[PD] ⚠ (P* 242)




[5_] ⚠ (P* 242)



[5]



[P5_] ⚠ (P* 242)



Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).


I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

Flat VS



H cm	L cm	l* cm	l* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
172.5	37.5	45.8	166.0	FL13S172015	2.8	309	598		
172.5	49.5	57.8	166.0	FL13S172020	3.7	411	797		
172.5	66.3	74.6	166.0	FL13S172027	5.0	555	1 076		
202.5	37.5	45.8	196.0	FL13S202015	3.2	358	694		
202.5	49.5	57.8	196.0	FL13S202020	4.2	477	925		
202.5	66.3	74.6	196.0	FL13S202027	5.7	644	1 249		

Flat VD



H cm	L cm	l* cm	l* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
172.5	37.5	45.8	166.0	FL13D172015	5.0	463	897		
172.5	49.5	57.8	166.0	FL13D172020	6.7	617	1 195		
172.5	66.3	74.6	166.0	FL13D172027	9.0	833	1 614		
202.5	37.5	45.8	196.0	FL13D202015	5.8	536	1 038		
202.5	49.5	57.8	196.0	FL13D202020	7.7	714	1 384		
202.5	66.3	74.6	196.0	FL13D202027	10.4	964	1 869		

[BASIC]

BIAN

BCOR

NEOP


Optional




Angled Valve
 Vanne équerre
 Eckausführung Ventil
 Válvula a escuadra
 [CROM] **E125QR**



Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático
 [CROM] **TTR**



$\varnothing \leq 16$ mm
 [CROM] **CTR**
 $16 \text{ mm} < \varnothing < 24$ mm
 [CROM] **CWR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo
 [CROM] **CSR**

*other colors and finishes on page / autres couleurs et finitions à la page
 andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo l* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página



The availability is limited to stocks
 Disponible jusqu'à épuisement des stocks
 Verfügbar solange der Vorrat reicht
 Disponible hasta fin de existencias

$$\text{Kcal} = \text{Watt} \times 0.860$$

$$\text{BTU} = \text{Watt} \times 3.413$$


$$\text{Watt } \Delta t \ 60^\circ = \text{Watt } \Delta t \ 50^\circ \times 1.267$$

$$\text{Watt } \Delta t \ 40^\circ = \text{Watt } \Delta t \ 50^\circ \times 0.749$$



$$\text{Watt } \Delta t \ 30^\circ = \text{Watt } \Delta t \ 50^\circ \times 0.516$$

$$\text{Watt } \Delta t \ 20^\circ = \text{Watt } \Delta t \ 50^\circ \times 0.305$$








p max = 10.0 bar

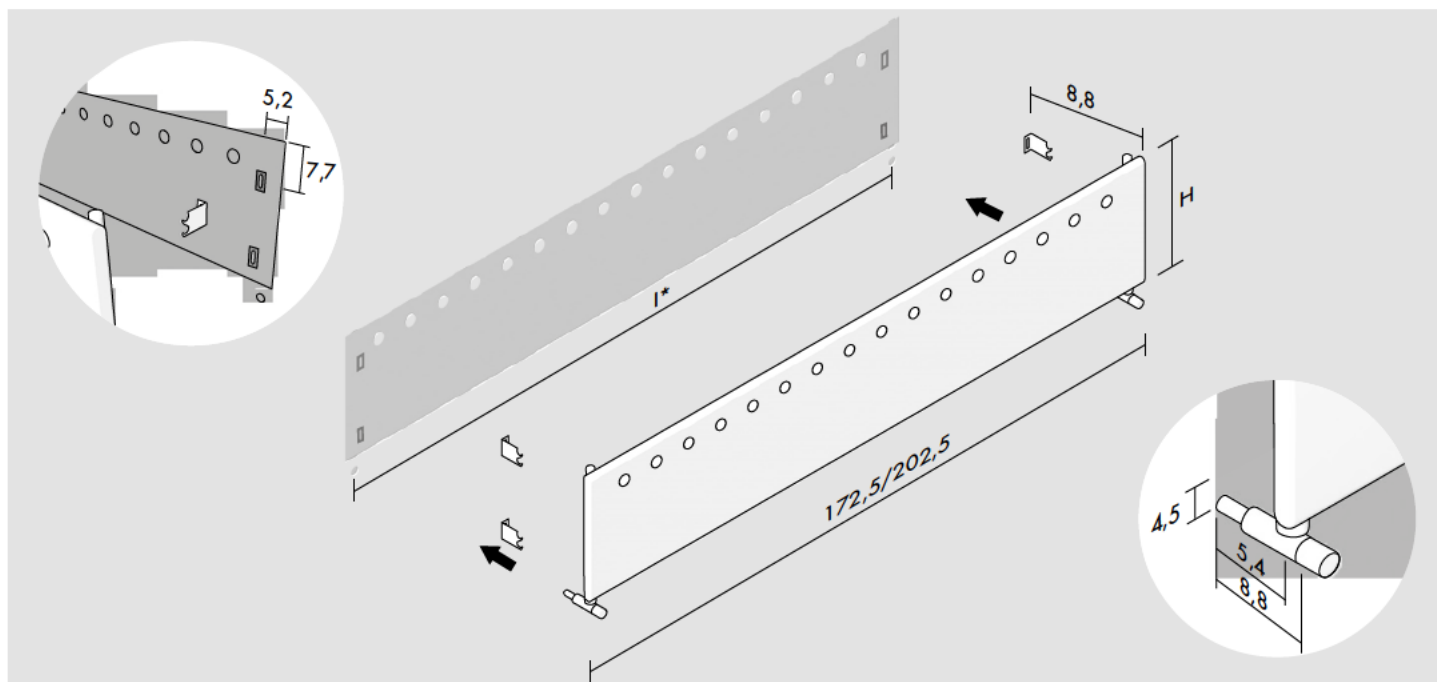

Standard connection / Raccord standard
 Standard Anschluss / Conexión estándar




Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial



Replace _ with connection S (Left) or D (Right). / Remplacer le _ avec raccordement S (Gauche) ou D (Droite). /
 Um linker oder rechter Anschluss zu bestellen, bitte das Symbol _ mit S (links) oder D (rechts) ersetzen. /
 Sustituir el _ con las conexiones S (Izquierda) o D (Derecha).


1* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

Flat OS



H cm	L cm	I* cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
37.5	172.5	45.8	166.0	FO13S172015_	2.8	338	655		
49.5	172.5	57.8	166.0	FO13S172020_	3.7	450	873		
66.3	172.5	74.6	166.0	FO13S172027_	5.0	608	1 178		
37.5	202.5	45.8	196.0	FO13S202015_	3.2	397	770		
49.5	202.5	57.8	196.0	FO13S202020_	4.2	530	1 027		
66.3	202.5	74.6	196.0	FO13S202027_	5.7	715	1 386		

Flat OD



H cm	L cm	I* cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
37.5	172.5	45.8	166.0	FO13D172015_	5.0	566	1 097		
49.5	172.5	57.8	166.0	FO13D172020_	6.7	774	1 500		
66.3	172.5	74.6	166.0	FO13D172027_	9.0	972	1 884		
37.5	202.5	45.8	196.0	FO13D202015_	5.8	666	1 290		
49.5	202.5	57.8	196.0	FO13D202020_	7.7	911	1 765		
66.3	202.5	74.6	196.0	FO13D202027_	10.4	1 143	2 216		

[BASIC]

BIAN

BCOR

NEOP


Optional



Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra
[CROM] **E125QR**




Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático
[CROM] **TTR**



$\varnothing \leq 16$ mm
[CROM] **CTR**

16 mm < $\varnothing$ < 24 mm
[CROM] **CWR**



Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo
[CROM] **CSR**

*other colors and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
P* = page / page / Seite / página