


Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.260
Watt Δt 40° = Watt Δt 50° x 0.754
Watt Δt 30° = Watt Δt 50° x 0.523
Watt Δt 20° = Watt Δt 50° x 0.313


p max = 8.0 bar

Reversible radiator
Radiateur réversible
Reversibler Heizkörper
Radiador reversible

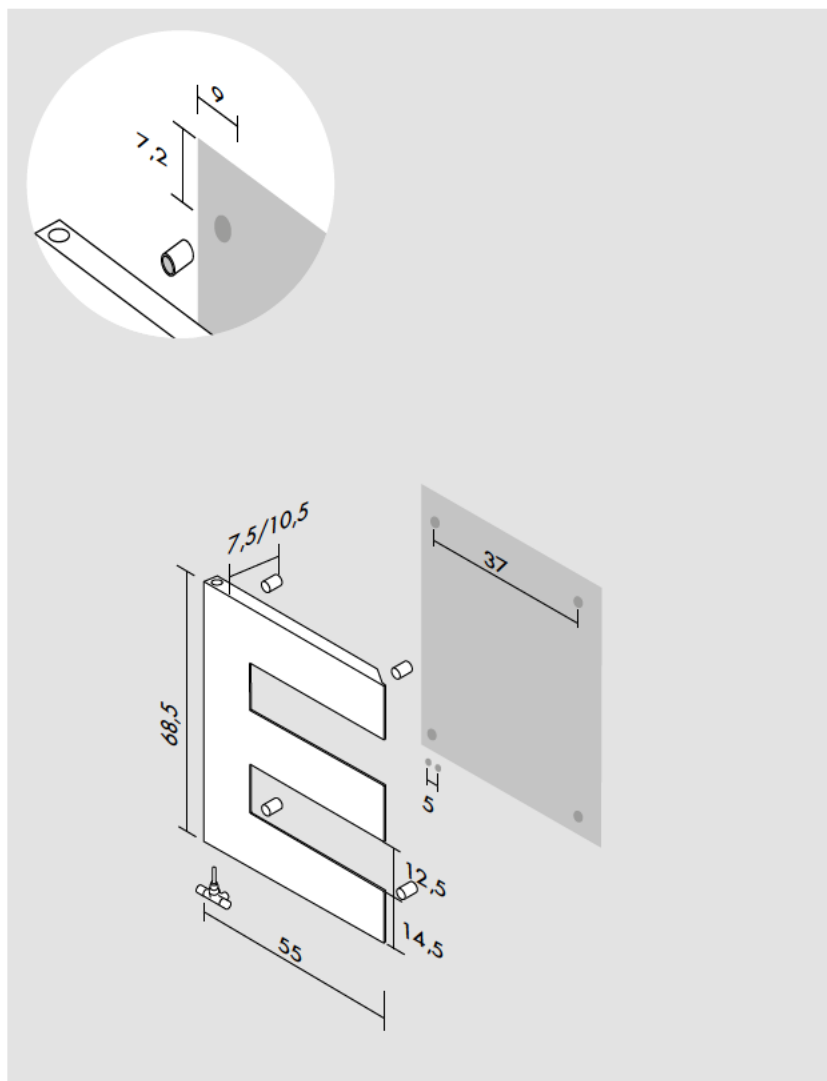



[F]

Standard connection / Raccord standard
Standard Anschluss / Conexión estándar

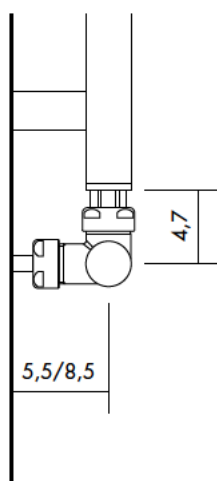


[H]


Special connection / Raccord spéciale
Speziell Anschluss / Conexión especial

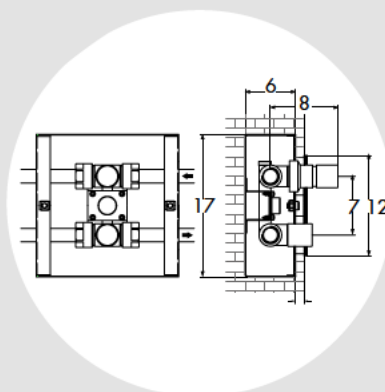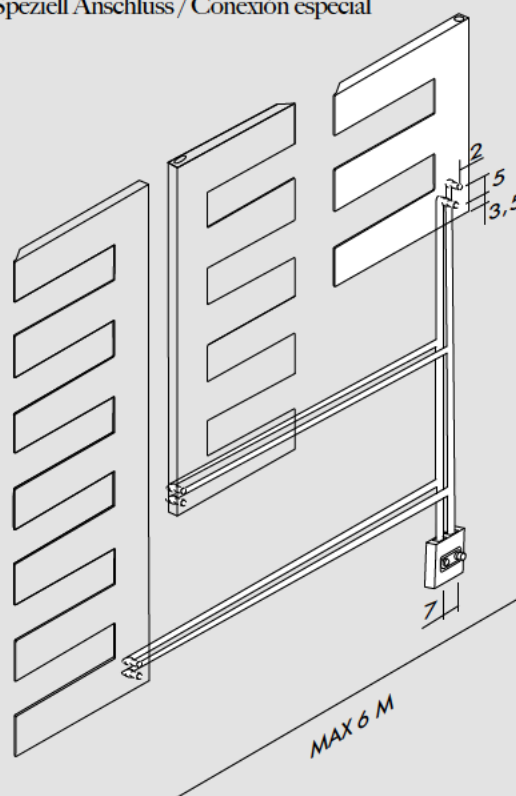

Built-in valves
Vanne à encastrer
Einbauventile
Válvulas de empotrar
[CROM] E12VIR

(P* = 234)



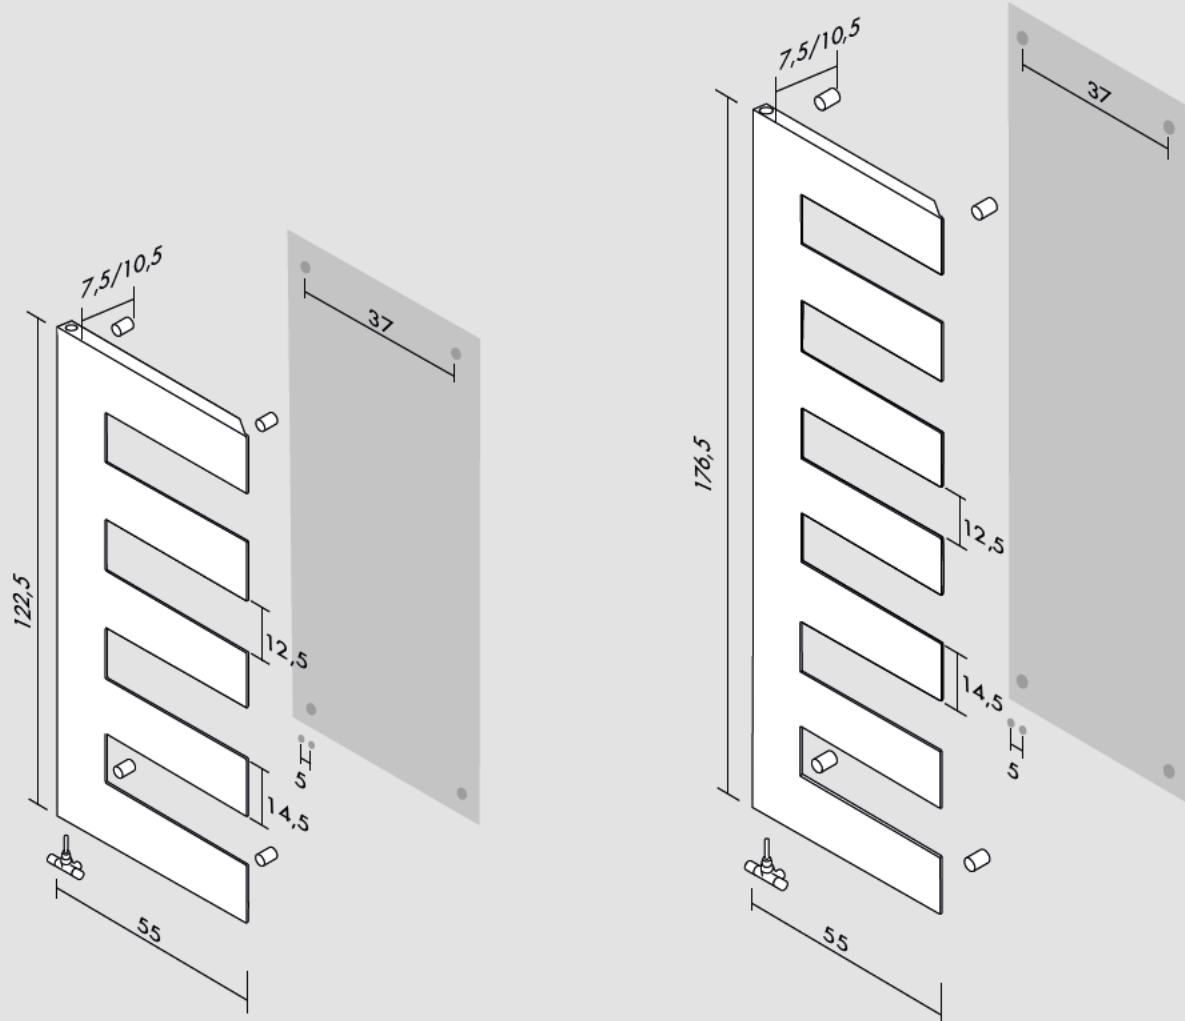

Pettine

H cm	L cm	l* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
68.5	55.0	5.0	PTNA068055	1.0	147	282		
122.5	55.0	5.0	PTNA122055	1.9	248	474		
176.5	55.0	5.0	PTNA176055	2.8	338	647		

[BASIC]

BCOR NEOP


Optional



Angled monotube valve
 Vanne monotube équerre
 Einrohrige Ventil
 Válvula monotubo a escuadra
 [CROM] **E12MBSQ**



Thermostatic head
 Tête thermostatique
 Thermostatkopf
 Cabezal termostático
 [CROM] **TTR**



Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo
 [CROM] **C5R**

*other colors and finishes on page / autres couleurs et finitions à la page
 andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo l* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página