

Rabbit 22



UNI EN 442 Δt 50° 75°/65°/20° - Δt 30° 55°/45°/20°




$Kcal = Watt \times 0.860$
 $BTU = Watt \times 3.413$

$Watt \Delta t 60^\circ = Watt \Delta t 50^\circ \times 1.238$
 $Watt \Delta t 40^\circ = Watt \Delta t 50^\circ \times 0.770$
 $Watt \Delta t 30^\circ = Watt \Delta t 50^\circ \times 0.550$
 $Watt \Delta t 20^\circ = Watt \Delta t 50^\circ \times 0.342$

p max = 10.0 bar

* = ON STOCK

Maximum stock order 5 pieces per item
Commande maximum 5 pièces par article
Maximalbestellung 5 Stück pro Artikel
Pedido máximo 5 piezas por artículo

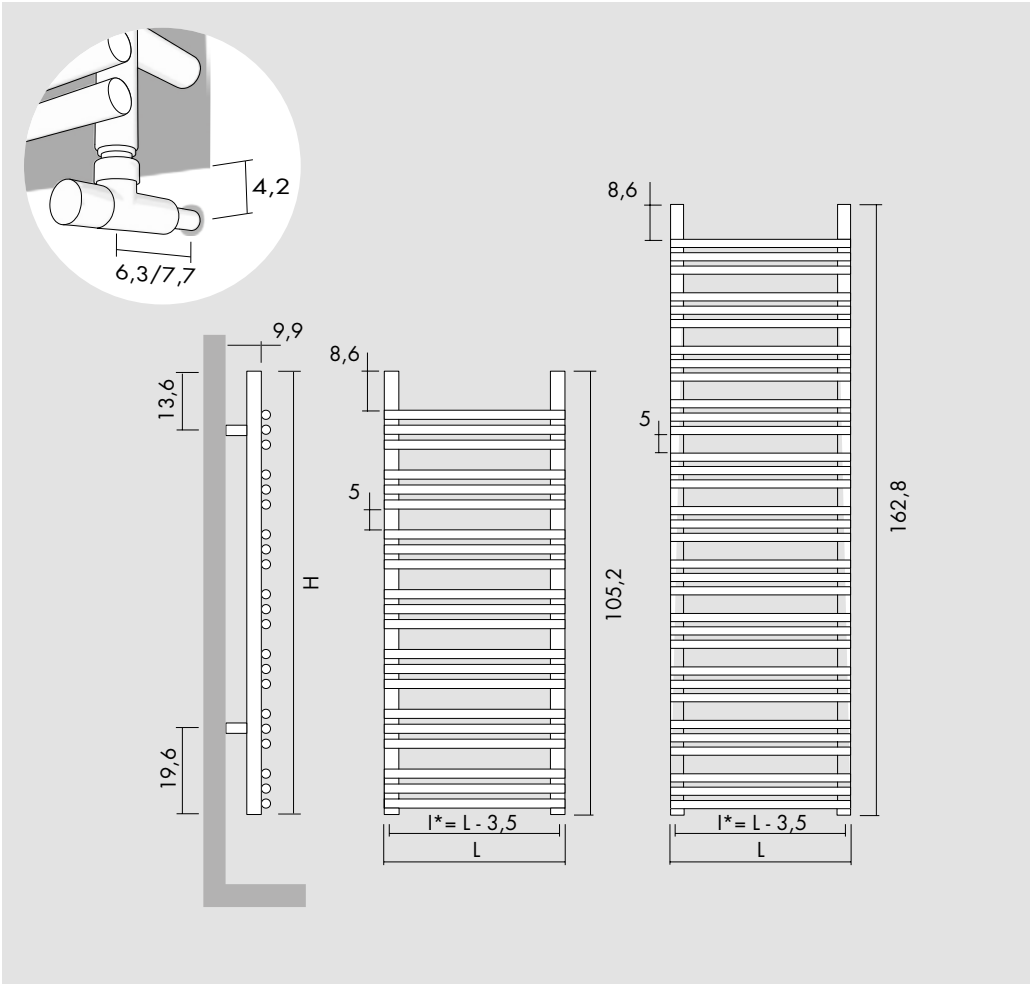

H cm	L cm	I* cm	art*	*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
105,2	43,5	40	RBT22043105	BCOR/NEOP	4,7	259	471		
105,2	48,5	45	RBT22048105	BCOR/NEOP	5,0	289	525		
162,8	43,5	40	RBT22043163	BCOR/NEOP	7,1	407	740		
162,8	48,5	45	RBT22048163	BCOR/NEOP	7,6	454	825		

[BASIC]


BIAN

BCOR


NEOP

Standard connection / Raccord standard /
Standard Anschluss / Conexión estándar

[A]



[AMD]



art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Lt* = water content / volume d'eau / Wassergehalt / contenido de agua

Dual application with schuko plug / Version mixte avec prise schuko /
Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko

H cm	L cm	I* cm	art*		Li*	watt Δt 30°	watt Δt 50°	watt	• [BASIC]	• [COLOR]
105,2	43,5	40	MC RBT22043105	BCOR/NEOP	4,7	259	471	400		
105,2	48,5	45	MC RBT22048105	BCOR/NEOP	5,0	289	525	400		
162,8	43,5	40	MC RBT22043163	BCOR/NEOP	7,1	407	740	600		
162,8	48,5	45	MC RBT22048163	BCOR/NEOP	7,6	454	825	600		

Included



KIT Electric heater with valves
KIT Chauffage électrique avec vannes.
Elektroheizungsbausatz mit Ventilen.
Kit calentador eléctrico con válvulas.

Optional



Receiver
Récepteur
Empfänger
Receptor

R10



Digital chronothermostat
Chronothermostat digital
Der digital Chronothermostat
Cronotermostato digital

T11

Dual electric element with thermostat / Mixte résistance avec thermostat /
Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	I* cm	art*		Li*	watt Δt 30°	watt Δt 50°	watt	• [BASIC]	• [COLOR]
105,2	43,5	40	MT RBT22043105	BCOR/NEOP	4,7	259	471	400		
105,2	48,5	45	MT RBT22048105	BCOR/NEOP	5,0	289	525	400		
162,8	43,5	40	MT RBT22043163	BCOR/NEOP	7,1	407	740	600		
162,8	48,5	45	MT RBT22048163	BCOR/NEOP	7,6	454	825	600		

Included



KIT Electric heater with valves and room thermostat.
KIT Chauffage électrique avec vannes et thermostat d'ambiance.
KIT Elektroheizung mit Ventilen und Raumthermostat.
KIT Calentador eléctrico con válvulas y termostato ambiente.



Infrared remote control
Télécommande infrarouge
Infrarot-Fernbedienung
Mando por infrarrojos

Optional




Reverse Valve
Vanne reverse
Reverse Ventil
Válvula a escuadra inversa

[CROM] **E12RVR**




Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[CROM] **TTR**



Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo

[CROM] **C5R**



$\varnothing \leq 16$ mm
[CROM] **CTR**

$16 \text{ mm} < \varnothing < 24$ mm
[CROM] **CWR**



Towel hooks
Paire de patère
Crochet das Bugel
Percha

[CROM] **BA13R**

*other colors and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones
Li* = water content / volume d'eau / Wassergehalt / contenido de agua P* = page / page / Seite / página