
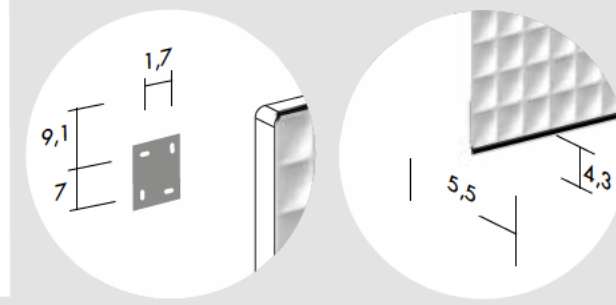


DESIGN PIERO LISSONI


$$p_{\max} = 5.0 \text{ bar}$$
UNI EN 442 Δt 50° 75°/65°/20° Δt 30° 55°/45°/20°[illegible]

A 10x10 grid with a horizontal line across the middle and a vertical line on the left. A bracket below the grid indicates a width of 5 units.

6,5

1*

1*

1*

MAX 6 M

17

7

12

8

Built-in valves
Vanne à encastrer
Einbauventile
Válvulas de empotrar


[CROM] **E12VIR**



(P* = 234)

Built-in valves
Vanne à encastrer
Einbauventile
Válvulas de empotrar

[CROM] E12VIR

$(P^* = 234)$



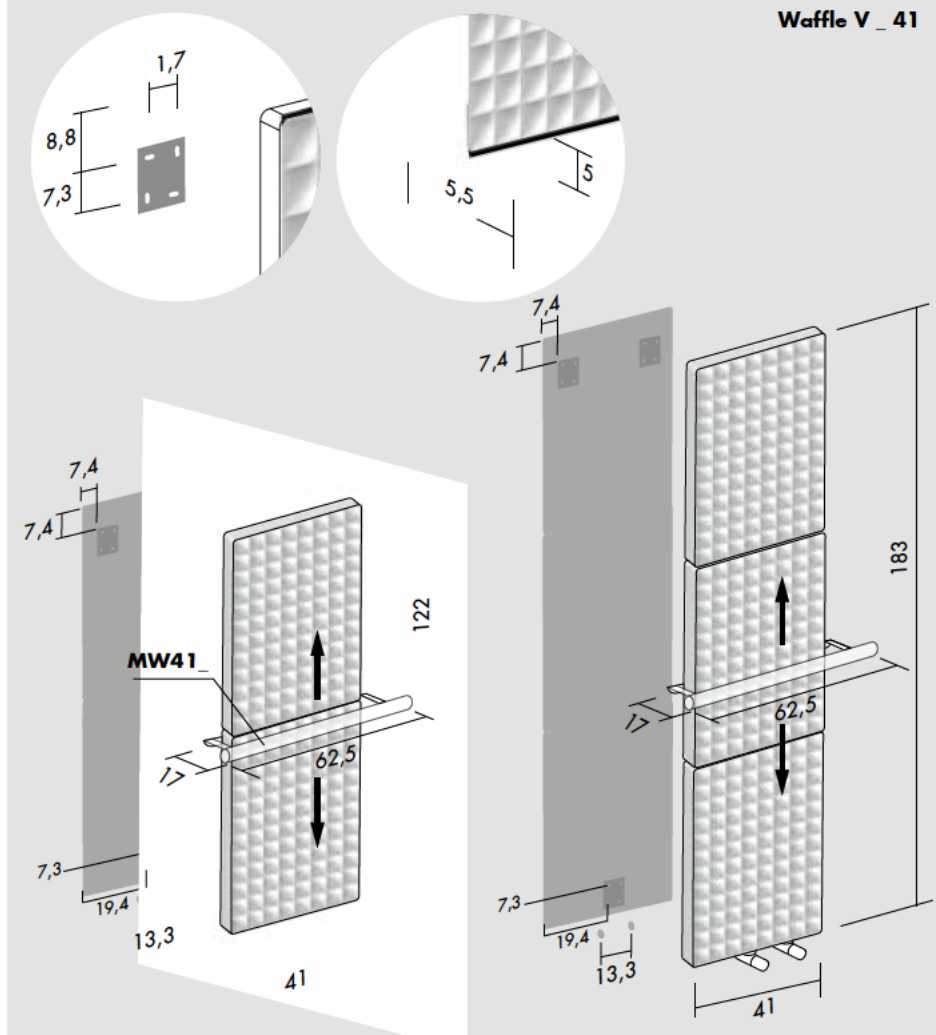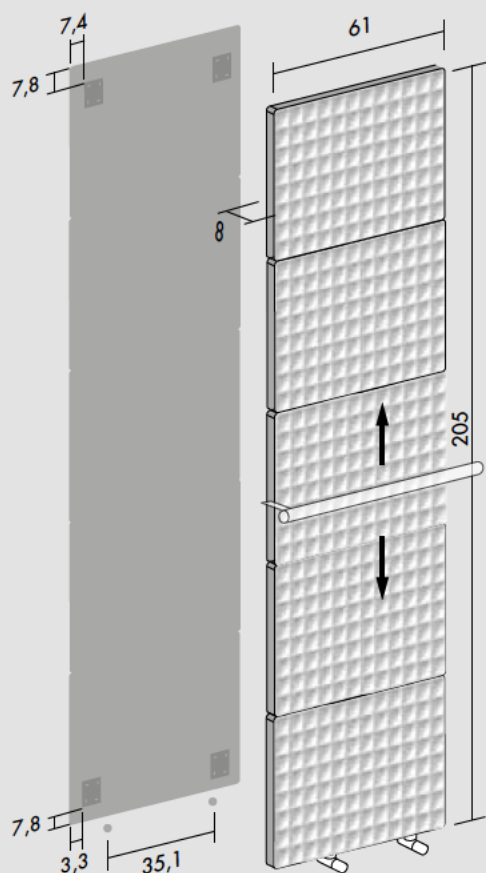

Waffle V _ 61

H cm	L cm	l* cm	art*	l*	watt Δt 30°	watt Δt 50°	• [BASIC]*
82.0	61.0	35.1	WAFV082061B	0.9	362	718	
123.0	61.0	35.1	WAFV123061B	1.3	528	1 048	
164.0	61.0	35.1	WAFV164061B	1.6	677	1 344	
205.0	61.0	35.1	WAFV205061B	2.0	822	1 632	

Waffle V _ 41

H cm	L cm	l* cm	art*	l*	watt Δt 30°	watt Δt 50°
122.0	41.0	13.3	WAFV122041B	0.7	344	682
183.0	41.0	13.3	WAFV183041B	1.1	508	1 008

[BASIC]

ARAG	ARRG	BLMT	BRAG
CRAG	FRAG	GRGR	GRPR
LRAG	MRAG	NRAG	CORT
GRSB	ARES	VRBR	RSCP
ROAN			

*The only colours available for this product are/ Les seules couleurs disponibles pour ce produit sont
Die einzigen Farben dieses Modells sind / Los únicos colores disponibles para este radiador son: [BASIC]


Optional



Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra
[CROM] **E125QR**



Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático
[CROM] **TTR**



$\varnothing \leq 16$ mm
[CROM] **CTR**

16 mm < $\varnothing$ < 24 mm
[CROM] **CWR**



Waffle
[LIGHT*] **AWFL**
[DARK*] **AWFD**



Waffle V _ 41
[LIGHT*] **MW41L**
[DARK*] **MW41D**

Waffle V _ 61
[LIGHT*] **MW61L**
[DARK*] **MW61D**

*other colours and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:




art* = item / modèle / Artikel / artículo l* = pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones
l* = water content for each element / volume d'eau pour chaque élément / Wassergehalt für Element / contenido de agua por cada elemento
LIGHT* = ash wood / bois de frêne / Eschenholz / madera de fresno DARK* = walnut wood / bois de noyer / Walnussholz / madera de nogal



$\text{Kcal} = \text{Watt} \times 0.860$
 $\text{BTU} = \text{Watt} \times 3.413$


$\text{Watt } \Delta t 60^\circ = \text{Watt } \Delta t 50^\circ \times 1,277$
 $\text{Watt } \Delta t 40^\circ = \text{Watt } \Delta t 50^\circ \times 0.741$
 $\text{Watt } \Delta t 30^\circ = \text{Watt } \Delta t 50^\circ \times 0.504$
 $\text{Watt } \Delta t 20^\circ = \text{Watt } \Delta t 50^\circ \times 0.292$

$p \text{ max} = 5.0 \text{ bar}$

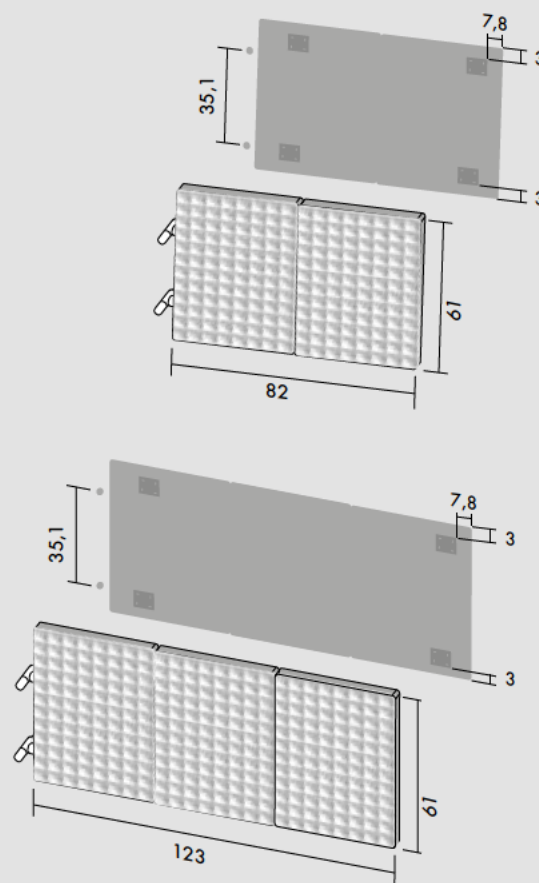


[F]

Standard connection / Raccord standard
 Standard Anschluss / Conexión estándar

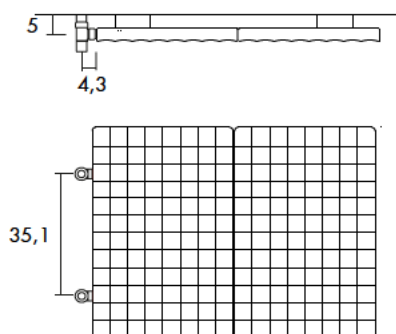



[5]

Special connection / Raccord spéciale
 Speziell Anschluss / Conexión especial






[H]

Special connection / Raccord spéciale
 Speziell Anschluss / Conexión especial

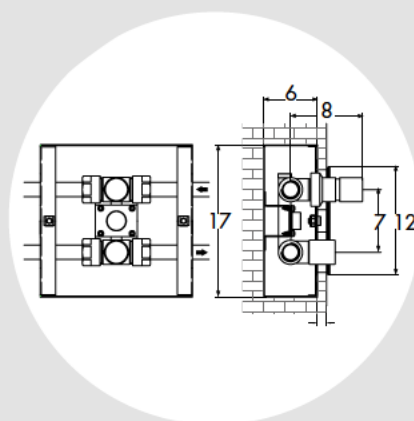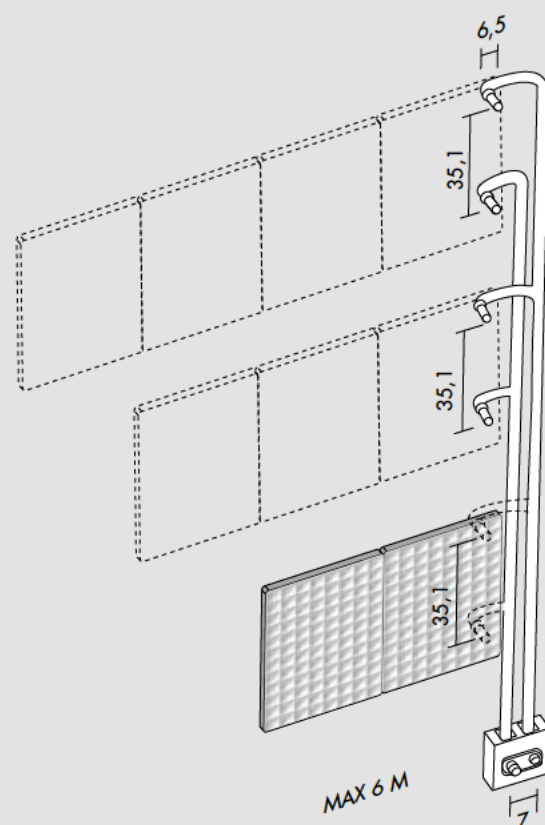

Built-in valves
 Vanne à encastrer
 Einbauventile
 Válvulas de empotrar
[CROM] E12VIR



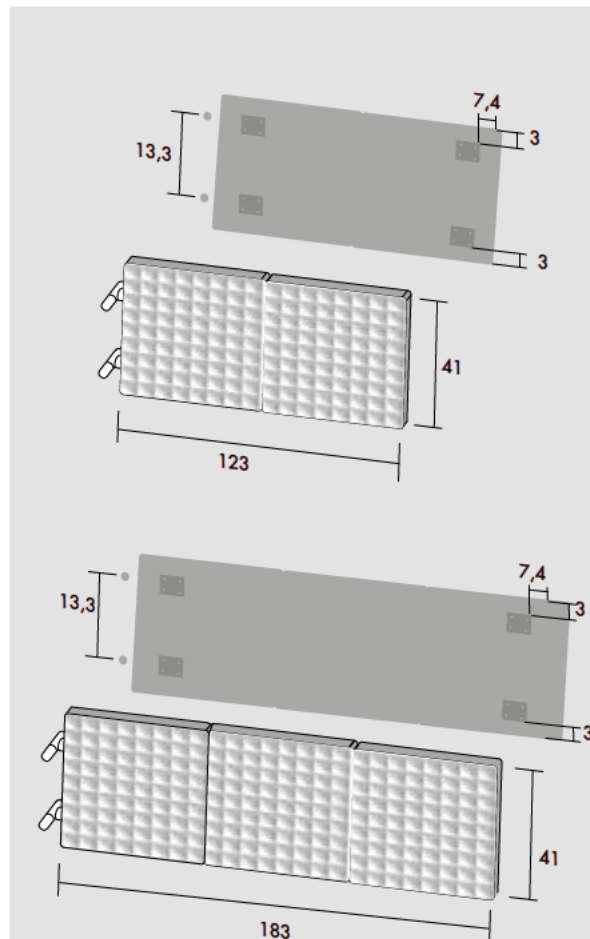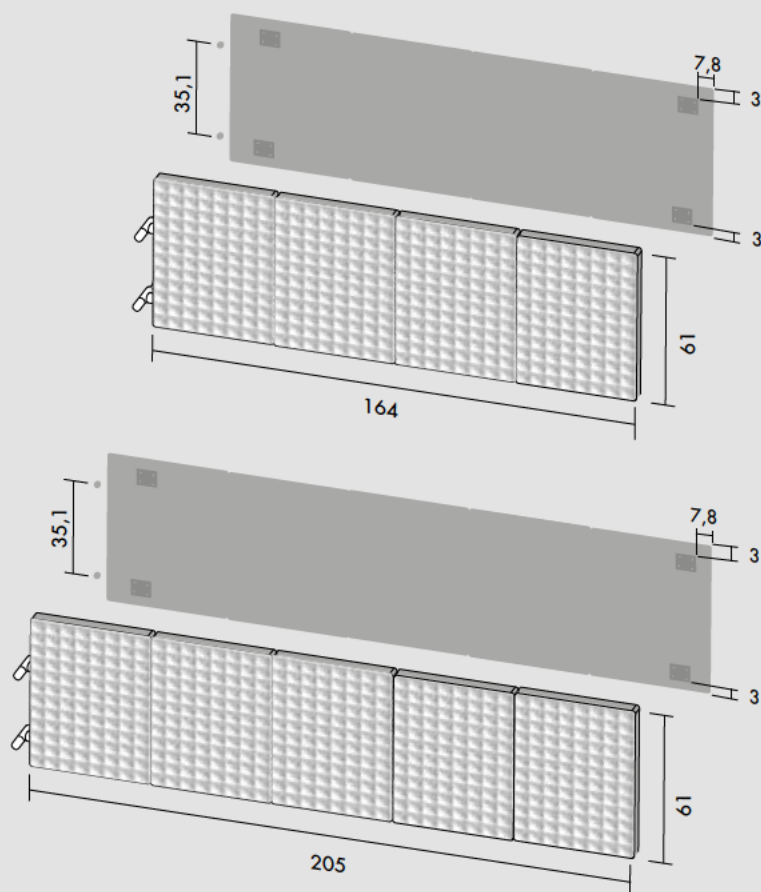**Waffle O**

H cm	L cm	I* cm	art*	lit*	watt Δt 30°	watt Δt 50°	• [BASIC]*
61.0	82.0	35.1	WAFO082061B	0.9	380	754	
61.0	123.0	35.1	WAFO123061B	1.3	554	1 100	
61.0	164.0	35.1	WAFO164061B	1.6	711	1 411	
61.0	205.0	35.1	WAFO205061B	2.0	864	1 714	

Waffle O _ 41

H cm	L cm	I* cm	art*	lit*	watt Δt 30°	watt Δt 50°
41.0	122.0	13.3	WAFO122041B	0.7	344	682
41.0	183.0	13.3	WAFO183041B	1.1	508	1 008

[BASIC]

ARAG	ARRG	BLMT	BRAG
CRAG	FRAG	GRGR	GRPR
LRAG	MRAG	NRAG	CORT
GRSB	ARES	VRBR	RSCP
ROAN			


*The only colours available for this product are/ Les seules couleurs disponibles pour ce produit sont
Die einzigen Farben dieses Modells sind / Los únicos colores disponibles para este radiador son: [BASIC]

Optional

Angled Valve
Vanne équerre
Eckausführung Ventil
Válvula a escuadra
[CROM] **E125QR**




Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático
[CROM] **TTR**



$\varnothing \leq 16$ mm
[CROM] **CTR**

16 mm < $\varnothing$ < 24 mm
[CROM] **CWR**



Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo
[CROM] **C5R**



Waffle
[LIGHT*] **AWFL**
[DARK*] **AWFD**

*other colors and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones
lit* = water content for each element / volume d'eau pour chaque élément / Wassergehalt für Element / contenido de agua por cada elemento
LIGHT* = ash wood / bois de frêne / Eschenholz / madera de fresno DARK* = walnut wood / bois de noyer / Walnussholz / madera de nogal